
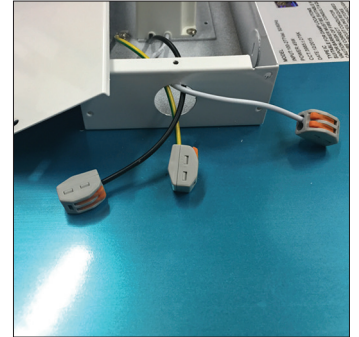



PROJECT:

COMMENTS :

ELUME 2x4Ft DIFFUSED SLIMFIXTURE - HARDWIRED MODEL# ELSF/2x4/



SPECIFICATIONS.

MODEL :	EXTREME OUTPUT : ELSF/2x4/EO/70W/(WW, NW or DW) HIGH OUTPUT : ELSF/2x4/HO/70W/(WW, NW or DW)
POWER CONSUMPTION :	EXTREME OUTPUT : 70 WATT HIGH OUTPUT : 62 WATT
COLOUR OPTIONS :	WARM WHITE (WW) : 3000K NEUTRAL WHITE (NW) : 4000K DAYLIGHT WHITE (DW) : 5000K
LUMEN OUTPUT :	EXTREME OUTPUT - 70W WARM WHITE (WW) : 5,518 Lm NEUTRAL WHITE (NW) : 6,287 Lm DAYLIGHT WHITE (DW) : 6,594 Lm HIGH OUTPUT - 62W WARM WHITE (WW) : 5,154 Lm NEUTRAL WHITE (NW) : 5,785 Lm DAYLIGHT WHITE (DW) : 6,010 Lm
IES FILES & PHOTOMETRICS AVAILABLE UPON REQUEST	
DIMENSIONS :	603 x 1212 x 52 mm [23.74 x 47.74 x 2.05"]
INSTALL OPTIONS :	RECESSED, SUSPENDED, SURFACE MOUNTED
L70 OPERATING LIFESPAN :	70,000 HOURS
INPUT VOLTAGE :	90 ~ 277 Vac
OPERATING VOLTAGE :	36Vdc
DIMMABILITY :	INTERNAL 0~10Vdc CONTROL SIGNAL [30% - 100%]
IP RATING :	IP20
WARRANTY :	5 YEAR WARRANTY

DIMENSIONS.

