
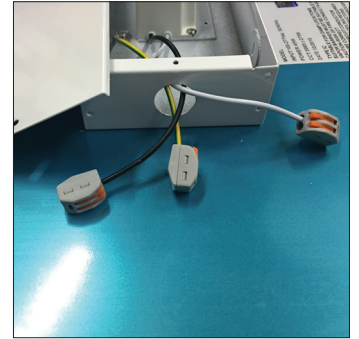



PROJECT:

COMMENTS :

## ELUME 2x2Ft DIFFUSED SLIMFIXTURE - HARDWIRED MODEL# ELSF/2x2/



### SPECIFICATIONS.

MODEL :	HIGH OUTPUT : ELSF/2x2/HO/36W/ (WW, NW or DW) EXTREME OUTPUT : ELSF/2x2/EO/45W/(WW, NW or DW)
POWER CONSUMPTION :	HIGH OUTPUT : 36 WATT EXTREME OUTPUT : 45 WATT
COLOUR OPTIONS :	WARM WHITE (WW) : 3000K NEUTRAL WHITE (NW) : 4000K DAYLIGHT WHITE (DW) : 5000K
LUMEN OUTPUT :	HIGH OUTPUT - 36W WARM WHITE (WW) : 3,172 Lm NEUTRAL WHITE (NW) : 3,465 Lm DAYLIGHT WHITE (DW) : 3,674 Lm
IES FILES & PHOTOMETRICS AVAILABLE UPON REQUEST	EXTREME OUTPUT - 45W WARM WHITE (WW) : 3,849 Lm NEUTRAL WHITE (NW) : 4,023 Lm DAYLIGHT WHITE (DW) : 4,058 Lm
DIMENSIONS :	603 x 603 x 52 mm [23.74 x 23.74 x 2.05"]
INSTALL OPTIONS :	RECESSED, SUSPENDED, SURFACE MOUNTED
L70 OPERATING LIFESPAN :	70,000 HOURS
INPUT VOLTAGE :	90 ~ 277 Vac
OPERATING VOLTAGE :	36Vdc
DIMMABILITY :	INTERNAL 0~10Vdc CONTROL SIGNAL [30% - 100%]
IP RATING :	IP20
WARRANTY :	5 YEAR WARRANTY

### DIMENSIONS.

