




CUSTOM LED LIGHT PANEL - SLIMCAB DIFFUSED FIXTURE

Light weight, aluminium framed, lay-in LED panel light fixture complete with diffusion lens specifically designed for elevator cab suspended ceilings or for utilization where any thin, diffused LED illumination is required


With a low profile of only 1.1" and their ability to be custom fabricated to your specific dimensions, our SlimCab LED Elevator Fixtures are ideal for providing a unique, bright, uniform LED light output in your elevator while in full compliance with elevator safety codes or for your general project requirements.

SPECIFICATIONS.


MODEL :	ELsf30e/
OUTPUT :	EXTREME OUTPUT
POWER CONSUMPTION :	34.5 W/M (10.52 W/Ft)
FRAME THICKNESS :	28 MM [1.125"]
FRAME STYLE :	DOUBLE CHANNEL BACK
OPERATING VOLTAGE :	24Vdc
DIMMABILITY OPTIONS :	0~10V PWM DALI WIRELESS REMOTE
Info available upon request	*Requires additional inline dimming module
OUTPUT LEVEL OPTIONS :	LEDS EMBEDDED ALONG 1, 2 OR ALL 4 EDGES
OUTPUT COLOUR OPTIONS :	DAYLIGHT: 5800K (RECOMMENDED)
	NEUTRAL: 4100K
	WARM: 3000k
	RGB (STATIC COLOURS ALSO AVAILABLE)
WEIGHT :	APPROX 2.4 Lbs (1.08 kg) / SqFt
MIN. SIZE :	8 x 12" [203 x 304 mm]
RECOMMENDED MAX. SIZE :	36 x 100" [914 x 2540 mm]
OPERATING LIFESPAN :	50,000 to 70,000 HOURS (L70)
WARRANTY :	3 YEAR WARRANTY
INPUT CONNECTOR :	2.5mm x 5.5mm PLUG n PLAY BARREL
INPUT LEAD LENGTH :	20" (508 mm) Standard
	*Custom length extensions available
INPUT CONNECTOR EXIT :	EXITS REAR OF PANEL
INPUT LEAD WIRE SIZE :	18 AWG 2 CONDUCTOR WIRE
OPERATING TEMPERATURE :	-30°C (-22 °F) ~ +40 °C (+104 °F)
POWER SUPPLY SPECS :	AVAILABLE UPON REQUEST

IMAGES :


FRONT

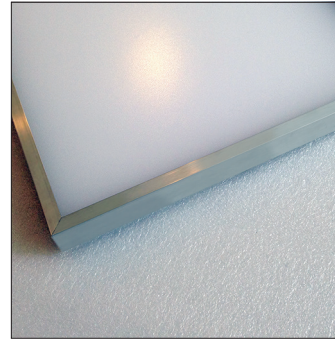


REAR

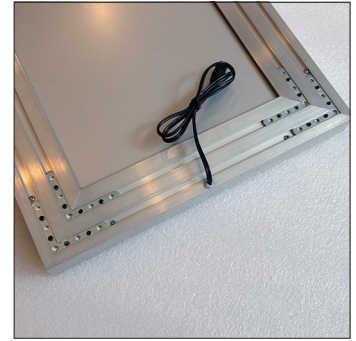

DETAILS :

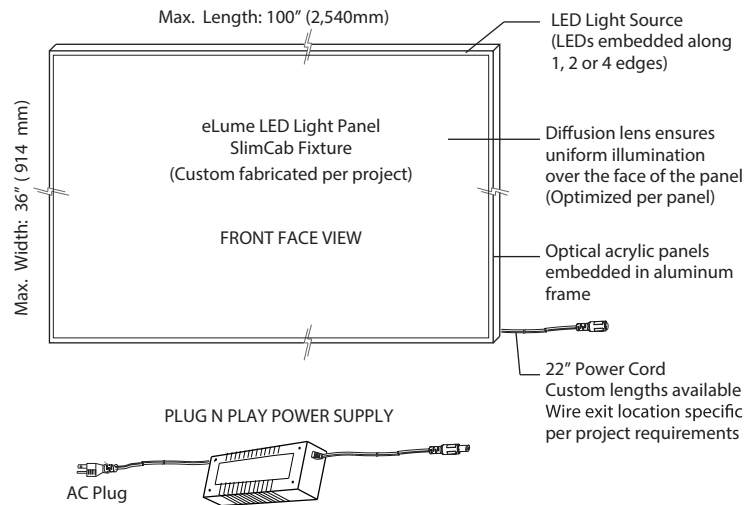

FRAME PROFILE : MORE DETAILED FRAME DIMENSIONS AVAILABLE

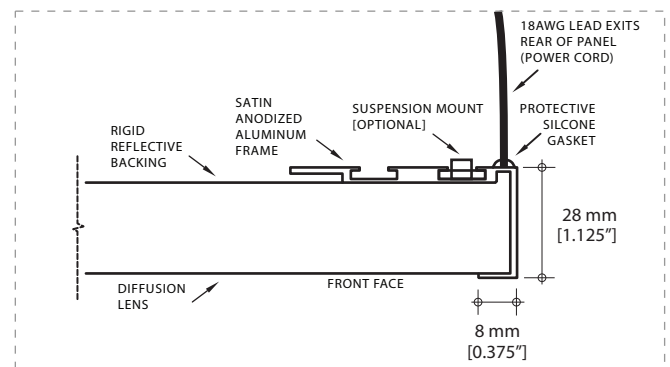

CONTACT INFO.

TEL: 1-416-225-6400

www.elumination.com

info@elumination.com

1621-38 McEwen Drive, Lakeview Industrial Plaza, Whitby, ON, Canada L1N 9A5